KILOTECH
Easy to use reliable scales

INTEGRATOR C



K851509	Integrator C15	0-6 kg / 6- 15 kg / 0-15 lb / 15-30 lb / 0-240 oz / 240-480 oz	GTIN 888960515099
K851510	Integrator C30	0-15 kg / 15-30 kg / 0-30 lb / 30-60 lb / 0-480 oz / 480-960 oz	GTIN 888960515105

Measurement Canada Authorized Service Provider – Fournisseur de services autorisé de Mesures Canada

USB

RS-232

LEGAL • LÉGALE Canada FOR TRADE • POUR LE COMMERCE

NCWM • NATIONAL CONFERENCE ON WEIGHTS AND MEASURES

www.kilotech.com

Key features

Pre-assigned navigation keys

Easy-to-use software

Large stainless steel platter

Large LCD displays

Rechargeable battery

Legal for trade approved

Speed keys

Visible in all lighting conditions

Designed for any business that sells product by the weight

- 265 PLU (5 direct, 260 indirect) memorizes item name, item code, life, ingredients, TARE and unit price
- Save, Quick memory, Prepack and Print keys facilitate operation
- Programmable barcode
- Easy to use software for downloading and uploading data
- Printer calibration performed through scale keyboard



High end features – entry level pricing

- Packed with features that make life simple: pre-assigned navigation keys, easy to use software for downloading and uploading data, and much more
- Whether you operate a coffee shop, a deli, a candy shop, seasonal market, movie theatre or a slew of supermarkets, this scale will support your requirements and assist you in being more profitable



Printer option




Back of scale



SPECIFICATIONS

Product Number and Name and GTIN	K851509 - Integrator C15 - 888960515099 K851510 - Integrator C30 - 888960515105
Capacity - Integrator C15	0-6 kg / 6- 15 kg / 0-15 lb / 15-30 lb / 0-240 oz / 240-480 oz
Capacity - Integrator C30	0-15 kg / 15-30 kg / 0-30 lb / 30-60 lb / 0-480 oz / 480-960 oz
Graduation - Integrator C15	0.002 kg / 0.005 kg 0.005 lb / 0.01 lb 0.1 oz / 0.2 oz
Graduation - Integrator C30	0.005 kg / 0.01 kg 0.01 lb / 0.02 lb 0.2 oz / 0.5 oz
Weighing Modes	kg, lb, oz
Direct PLU	5
Indirect PLU	260
RS232 / USB	Yes
40 mm label (no ingredients)	Yes (58 x 40 mm)
60 mm label (ingredients)	Yes (58 x 60 mm)
Operating Temperature	0°C - 40°C (50°F - 104°F)
Operating Humidity Level %	<60% RH non-condensing
Power Supply	12 VDC 500mA adapter / internal rechargeable battery, provides 12 hours of use between charges
Optional Printer with label separator kit	K861901 - Printer with cable (ARGOX OS 2103D)

mm (inches)

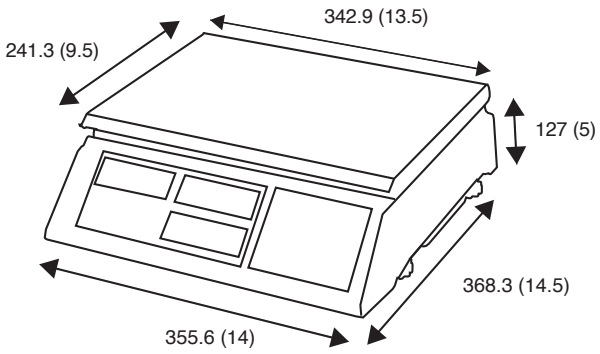


PLU Data

- Commodity Name
- Packed on Date
- Best Before Date
- Tare Weight
- Unit Price
- Ingredients

Printing Data

- Commodity Name (16 characters)
- Total Price (6 digits)
- Unit Price (6 digits)
- Net Weight (6 digits)
- Packed-on Date
- Best Before Date
- Store Name (2 lines of 12 characters)
- 80 characters
- Ingredients





Kilotech Inc.

3500 boul. Poirier, Saint-Laurent, QC H4R 2J5
Phone Canada: 1-800-694-4445 | Montreal: 1-514-420-6020 | USA: 1-877-328-5988

www.kilotech.com

You can count on your Kilotech scale to ensure profitability, consistency and eliminate wastage. Every time.

