PizzaMaster® 350 series

Technical Specifications – Order Form

■ PM 351ED-1 ■ PM 351ED-2
■ PM 352ED-2 ■ PM 352ED-3 ■ PM 352ED-4
■ PM 351ED-1DW ■ PM 351ED-2DW
■ PM 352ED-2DW ■ PM 352ED-3DW ■ PM 352ED-4DW

CounterTop Electric Deck Ovens

Professional Performance. CounterTop Conveniance.



- 95 Different Sizes
  Including Modular and CounterTop ovens
- High Power
- High Temperature
- Special Clay Hearthstone
- Unique Scandinavian Design
- "Extra" is Standard
- Smart Unique Options
- International Certificates

External and Inside dimensions per deck for models

Internal dimensions per deck: **depth** =355mm/14in, **width** =see figures below **(1)** =355mm/14in, **(2)** =710mm/28in

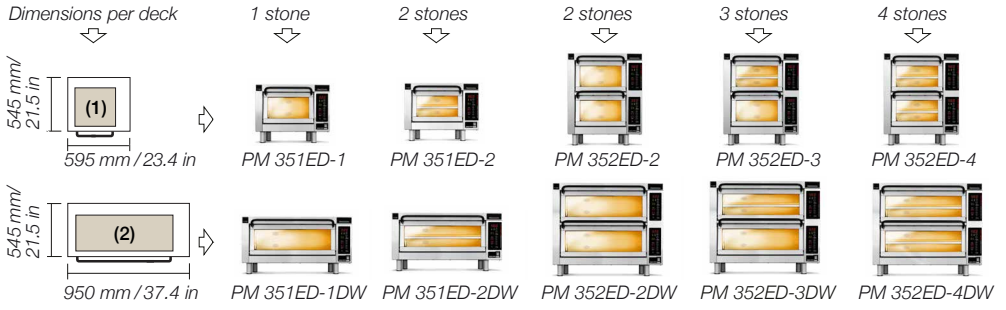

Mandatory fields

Electrical connection

- ☐ 230V 1ph
- ☐ 230V 3ph
- ☐ 400V 3ph+N
- ☐ 200V 3ph
- ☐ 208V 1ph
- ☐ 208V 3ph
- ☐ 240V 1ph
- ☐ 240V 3ph
- ☐ 480V 3ph+N
- ☐ 400V 3ph
- ☐ 460V 3ph

Optional equipment

Make your choice

- ☐ Marine model

High temperature deck* (XTREME Performance) 500°C/932°F

- ☐ Deck 1 (lower)
- ☐ Deck 2

**Not compatible with Steam system. Unavailable for PM 351ED-1, PM 352ED-2, and lower deck of PM 352ED-3.*

PizzaMaster design solution

- ☐ Phantom Black

Artisan high-temp clay stone*

- ☐ Deck 1 (lower)
- ☐ Deck 2

**Optimized for baking above 380°C /716°F*

Steam system*

- ☐ Deck 1 (lower)
- ☐ Deck 2

**Not compatible with high temperature deck and/or oven deck with 2 stones per deck. Add oven depth with 100 mm / 4 in.*

Support

- ☐ PM 351-S
  any 351 model
- ☐ PM 352-S
  any 352 model

Shelf support package *

- ☐ SP-1
  for support 351-S
- ☐ SP-2
  for support 352-S

Support

- ☐ PM 351DW-S
  any 351 model
- ☐ PM 352DW-S
  any 352 model

Shelf support package *

- ☐ SP-1DW
  for support 351DW-S
- ☐ SP-2DW
  for support 352DW-S

**Shelf support package is ordered separately, Includes Center Support Post, Rack rails (4pcs), Shelf supports (Std width: 8pcs, 4 per side), (Dbl width: 16pcs, 8 per side).*

Standard equipment

- Digital Display
- 400°C /752°F as standard
- Turbo start function
- Resettable overheat protection
- Indicators for thermostat and turbo-start
- Timer with manual shut-off alarm
- Auto-Timer with alarm
- Hearth of natural material with crisping function
- 1 or 2 stones per deck
- Up to 3 heat zones
- See-through oven door with heat-reflecting glass
- Dual Xenon lightning in each deck
- Stainless steel exterior
  Except of exterior bottom and backside

Approvals *available*

E326671 cULus LISTED

E326671 cULus LISTED

E335108 ANSI/NSF 4

CE

CB

COMMERCIAL COOKING APPLIANCE

2 YEAR WARRANTY Limited

BakePartner has a policy of continuous product development and reserves the right to change specifications and designs without prior notice.

PizzaMaster® 350 series

Technical Specifications – Installation Guide

■ PM 351ED-1 ■ PM 351ED-2
■ PM 352ED-2 ■ PM 352ED-3 ■ PM 352ED-4
■ PM 351ED-1DW ■ PM 351ED-2DW
■ PM 352ED-2DW ■ PM 352ED-3DW ■ PM 352ED-4DW

PizzaMaster® CounterTop 350 series

Model	Dimensions in millimetres Width x Depth x Height			Dimensions in inches Width x Depth x Height			Separate decks per oven	Hearth-stones per oven	Power kW	Weight Kg / lb
	External	Internal		External	Internal (per hearthstone)					
PM 351ED-1	595x 545x500	355x355	x195(1 pcs)	23.4 x 21.5 x 19.7	14.0x14.0	x7.7 (1 pcs)	1	1	2.25	40/88
PM 351ED-2			x85 (2 pcs)			x3.4 (2 pcs)		2	3.35	45/99
PM 352ED-2	595x 545x800		x195(2 pcs)	23.4 x 21.5 x 31.5		x7.7 (2 pcs)	2		4.50	65/143
PM 352ED-3			x195(1 pcs) x85 (2 pcs)			x7.7 (1 pcs) x3.4 (2 pcs)		3	5.60	70/154
PM 352ED-4			x85 (4 pcs)			x7.7 (4 pcs)		4	6.70	75/165
PM 351ED-1DW	950x 545x500	710 x 355	x195(1 pcs)	37.4 x 21.5 x 19.7	28.0 x 14.0	x7.7 (1 pcs)	1	1	4.45	70/154
PM 351ED-2DW			x85 (2 pcs)			x3.4 (2 pcs)		2	6.65	80/176
PM 352ED-2DW	950x 545x800		x195(2 pcs)	37.4 x 21.5 x 31.5		x7.7 (2 pcs)	2		8.90	98/216
PM 352ED-3DW			x195(1 pcs) x85 (2 pcs)			x7.7 (1 pcs) x3.4 (2 pcs)		3	11.10	108/238
PM 352ED-4DW			x85 (4 pcs)			x7.7 (4 pcs)		4	13.30	118/260

Support 350 series

Model	Dimensions in millimetres Width x Depth x Height		Dimensions in inches Width x Depth x Height		Shelf support package (option)	No. of shelf possible to stack per package	Weight Kg / lb
PM 351-S	595x598	x900	23.4 x 23.6	x 35.4	SP-1	4	14/31
PM 352-S		x750		x29.5	SP-2	4	13/29
PM351DW-S	950x598	x900	37.4 x 23.6	x 35.4	SP-1DW	8	25/55
PM 352DW-S		x750		x 29.5	SP-2DW	8	24/53

IMPORTANT!

All installations and services must comply to local and national codes and be carried out by qualified servicers and electricians only.

Placement
Oven must be installed with a clearance of 50 mm / 2 in towards all sides.

Electrical
For wire dimension (mm2/AWG) see ovens connecting terminal and/or the PizzaMaster's Owner's Manual.

Ventilation
For ventilation requirements, please refer to PizzaMaster's Owner's Manual.

Water
Pressure between 1-6 bar (0.1-0.6 MPa). Connection G ¾ " / NH ¾ " (for US/CAN).

Connections



Amps per phase and per Oven (models with 2 numbers require 2 separate electrical supplies)

Model	230V 1ph+N	230V 3ph	400V 3ph+N	200V 3ph	208V 1ph	208V 3ph	240V 1ph	240V 3ph	480V 3ph+N	400V 3ph	460V 3ph (440-480)
PM 351ED-1	9.8	-	-	9.1	10.9	-	10.2	-	-	-	-
PM 351ED-2	14.5	8.5	5.0	9.1	16.2	9.4	15.2	8.9	4.2	4.9	4.3
PM 352ED-2	19.6	12.8	10.0	13.7	21.7	14.2	20.4	13.4	8.3	7.4	6.4
PM 352ED-3	24.4	17.0	10.0	18.1	27.0	18.8	25.4	17.7	8.3	9.8	8.5
PM 352ED-4	29.2	17.0	10.0	18.1	32.3	18.8	30.4	17.7	8.3	9.8	8.5
PM 351ED-1DW	19.4	12.7	9.6	13.5	21.4	14.0	20.2	13.2	8.0	7.3	6.4
PM 351ED-2DW	29.0	16.8	9.8	17.9	32.0	18.6	30.2	17.5	8.2	9.7	8.4
PM 352ED-2DW	19.6+19.2	12.8+12.5	14.4	13.7+13.3	21.7+21.2	14.2+13.8	20.4+20.0	13.4+13.0	12.0	14.3	12.5
PM 352ED-3DW	19.6+28.7	12.8+16.6	19.2	13.7+17.7	21.7+31.8	14.2+18.4	20.4+30.0	13.4+17.3	15.9	16.9	14.7
PM 352ED-4DW	29.2+28.7	17.0+16.6	19.6	18.1+17.7	32.3+31.8	18.8+18.4	30.4+30.0	17.7+17.3	16.3	19.3	16.8

Distributor

Built for Extreme Temperature



Support: PM 351-S *Ovens: 1 deck model*



Support: PM 352-S *Ovens: 2 deck model*



Support: PM 351DW-S *Ovens: 1 deck model*



Support: PM 352DW-S *Ovens: 2 deck model*

BakePartner has a policy of continuous product development and reserves the right to change specifications and designs without prior notice.