
Fit ST

Speed Oven



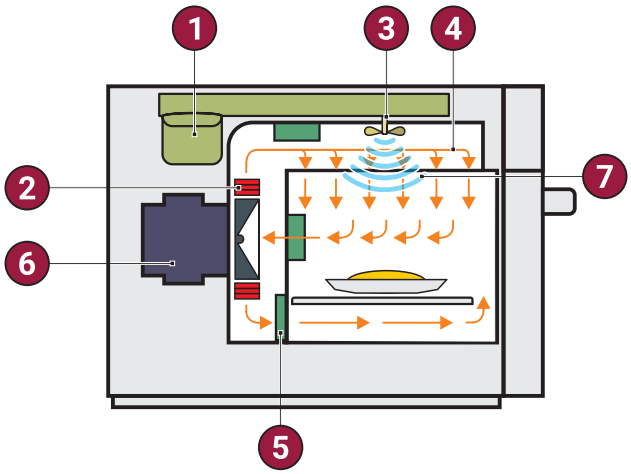

1 - Magnetron
2 - Resistance (infrared)
3 - Stirrer
4 - Impinged air
5 - Catalytic converter
6 - Blower motor
7 - Microwaves

RECOMMENDATION

- The Fit ST high-speed oven is designed for efficiently finalizing refrigerated, fresh, or frozen foods, such as breakfast sandwiches, chicken wings, muffins, lasagnas, mac & cheese, sub sandwiches, and other partially prepared dishes. It delivers excellent flavor, appearance, and crispiness. The combination of impinged air and microwaves allows for heating, browning, or toasting foods faster than traditional methods.

TECHNICAL FEATURES AND FUNCTIONALITIES

- It has 2 (two) magnetrons, each with a power of 1,100 watts.
- Stores 1024 recipes with up to 8 steps each, divided into 16 groups.
- USB port for system updates and importing/exporting groups, recipes, and settings.
- Wi-Fi and wired (RJ45) capabilities, enabling remote management for system updates and importing/exporting groups, recipes, and settings via the IOK online platform.
- Adjustable temperature from 86°F (30°C) to 536°F (280°C).
- Independent control of impinged air (high-speed air blast) and microwaves.
- User-friendly touchscreen panel.
- Constructed from stainless steel.
- Certified Ventless – no need for vent hoods. Easy-to-remove catalytic converter for hassle-free cleaning.
- Additional functionalities: Test Mode and Favorites.
- Daily cleaning guide with explanatory videos displayed on the screen, demonstrating the step-by-step process.
- Warranty: one (1) year covering manufacturer defects, part failures, and pre-approved labor, and two (2) years on all the heating elements, magnetrons, and blower motor of the oven.

INCLUDED ACCESSORIES

- 01 - Aluminum Paddle;
- 01 - Solid PTFE Basket.

CE

VENTLESS EPA 202 CERTIFIED

Prática Produtos S.A. - Brasil
Rodovia BR 459, km 101 S/N
37.556-140, Pouso Alegre-MG

Tel: +55 35 3449 1200
pratica@praticabr.com


Prática Products, Inc - USA
911 E State Hwy 121 Business, #101
Lewisville, TX 75057

Phone: +1.214.584.6269
info@praticausa.com


PRÁTICA

Fit ST
Speed Oven

PRODUCT DIMENSIONS

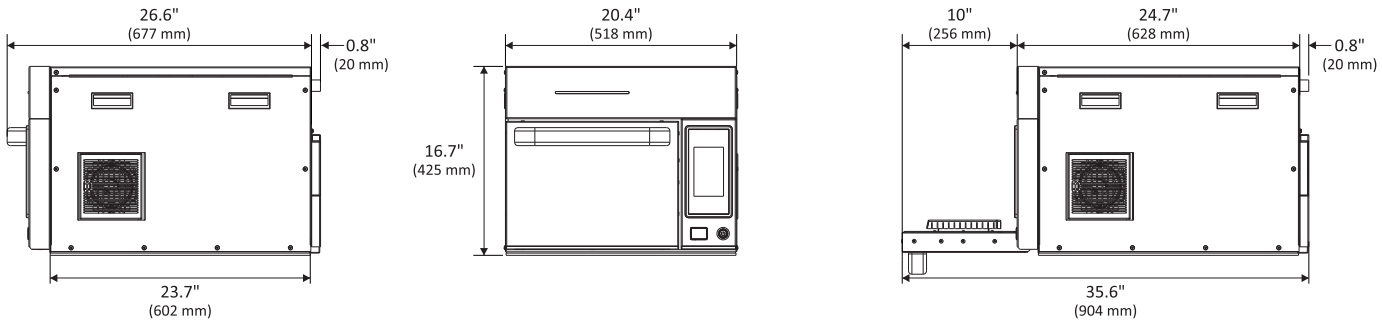

INSTALLATION

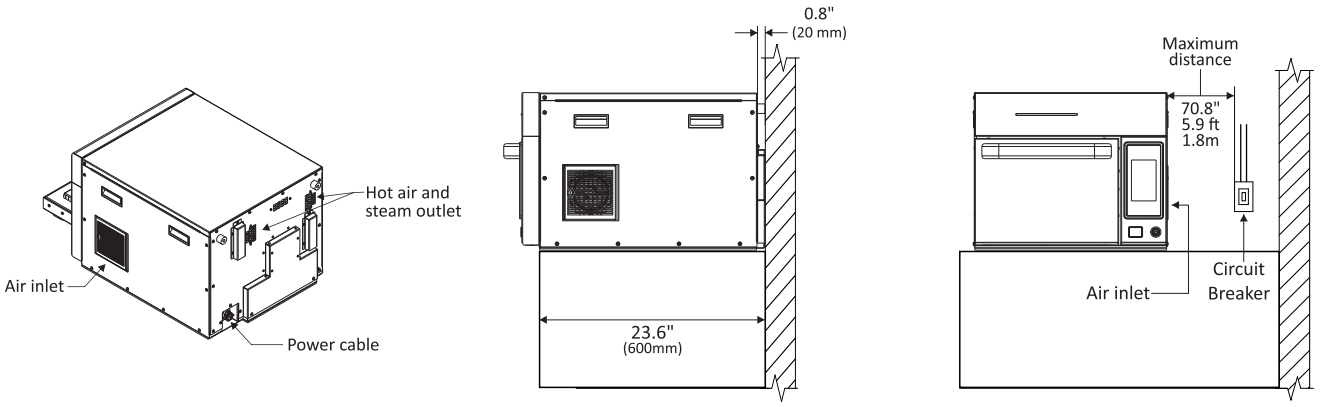

ELECTRICAL SPECIFICATIONS

Ensure that the electrical configuration of the building is in accordance with the technical specifications located on the serial plate located on the back panel of the unit.

The outlet should be located no more than 70.8" / 5.9ft away from the unit. This plug must be connected to a properly installed and grounded outlet.

In case of a short circuit, the unit's ground connection reduces the risk of electrical shock.The customer is responsible for the electrical conditions at the installation site.

Region	Voltage (V)	Phases	Freq. (Hz)	Power (kW)	*Circuit Breaker (A)	Cable	Socket	
USA/ Canada	208 240	Single	60	6.2 7.0	30	3x10 AWG	NEMA 6-30	
Europe	230	Single	50	6.8	32	3x4 mm²	32A (2P+E)	
	380	Multi	50	6.5	16	5x2,5 mm²	16A (3P+N+E)	
	400	Multi	50	6.8	16	5x2,5 mm²	16A (3P+N+E)	
Saudi Arabia	220	Single	60	6.5	32	3x4 mm²	32A (2P+E)	NOT PROVIDED
Middle East (MEA)	230	Single	50	6.8	32	3x4 mm²	32A (2P+E)	
	380	Multi	50	6.5	16	5x2,5 mm²	16A (3P+N+E)	
	400	Multi	50	6.8	16	5x2,5 mm²	16A (3P+N+E)	

*Prática recommends installing a type D circuit breaker.
The electrical installation must comply with local regulations.

GENERAL INSTRUCTIONS

The oven must be installed on a base or counter that supports the weight of the unit (approximately 158.7 lbs. / 72 kg). For proper ventilation, a minimum space of 0.8" is required between the back of the oven and the wall. The bumper, located at the back of the oven, has been designed to provide this necessary space at the back of the oven and cannot be removed.

Do not block the air inlets and outlets located on the front and back of the oven.

It is not recommended for the unit to be positioned near stoves, deep fryers, hot plates and other equipment that releases fat, fumes and heat.

The oven must be installed at a leveled and ventilated location.

Improper installation may void the equipment warranty.

DIMENSIONS

	Product dimensions				Boxed product dimensions			
Fit ST	Height	Width	Depth	Weight	Height	Width	Depth	Weight
	16.7" (425mm)	20.4" (518mm)	27.4" (697mm)	158.7lbs 72kg	28.4" (722mm)	24.4" (620mm)	32.5" (825mm)	207.2lbs 94kg

Chamber dimensions	Capacity	Height	Width	Depth
	0.45 cu.ft 13L	5.2" (133mm)	12.4" (315mm)	12.1" (308mm)

Clearance	Left side	Back	Right side
	0" (0mm)	0" (0mm)	1" (25mm)